

## UPN PROFILES



› Range of the size

	<b>h</b>	<b>b</b>	<b>t</b>
UPN 80	80	45	6.0 mm
UPN 100	100	50	6.0 mm
UPN 120	120	55	7.0 mm
UPN 140	140	60	7.0 mm
UPN 160	160	65	7.5 mm
UPN 180	180	70	8.0 mm
UPN 200	200	75	8.5 mm
UPN 220	220	80	9.0 mm
UPN 240	240	85	9.5 mm
UPN 260	260	90	10.0 mm
UPN 280	280	95	10.0 mm
UPN 300	300	100	10.0 mm
UPN 320	320	100	14.0 mm
UPN 350	350	100	14.0 mm
UPN 400	400	110	14.0 mm

## UAC PROFILES

› Range of the size

	<b>kg/mt</b>	<b>h</b>	<b>b</b>	<b>s</b>
UAC 30	1.45	30	15	3
UAC 35	1.8	35	17.4	3
UAC 40	2.09	40	20	3
UAC 50	3.09	50	25	3.1
UAC 60	4.02	60	30	
UAC 70	6.1	70	39.3	

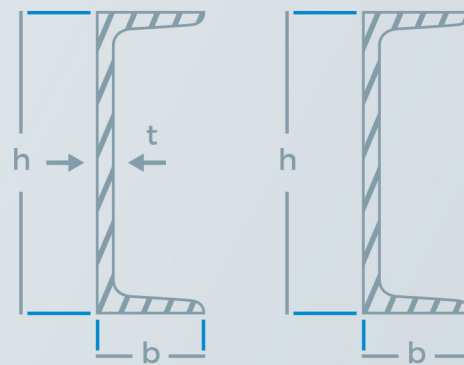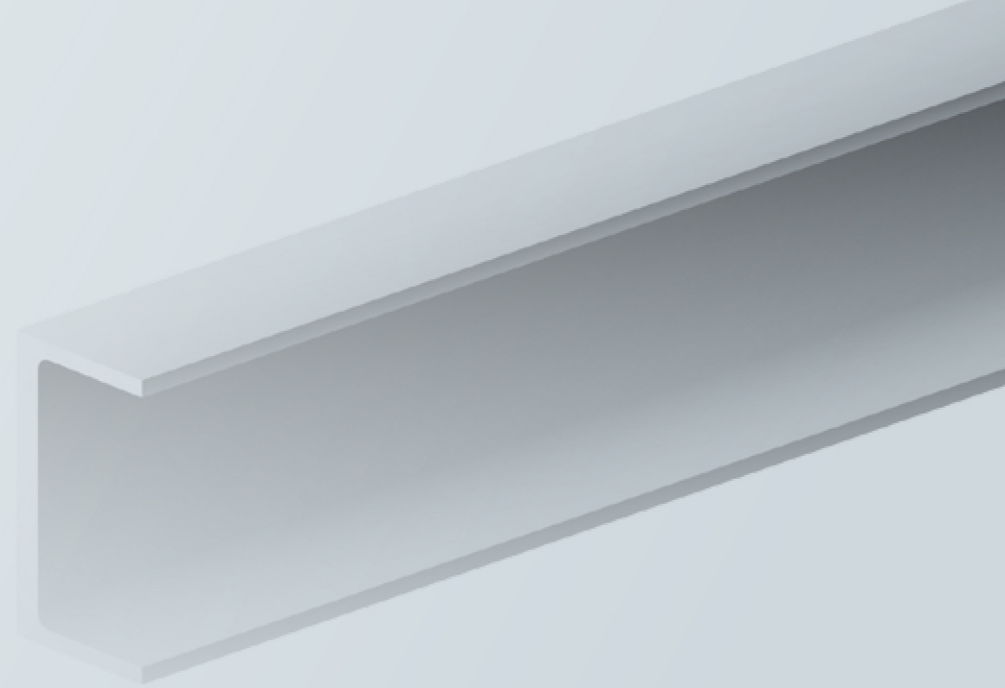

### Quality

S275JR EN10025 or ASTM A36

### Rolling Tolerances

DIN 1026 - 1

**i** Inch sizes are available.  
Please ask for other steel size and qualities.